


# PS5026-E26

## Max14um Performance On Display

- PCIe Gen5x4
- TSMC 12nm Process
- LPDDR4
- 8-channel with 32CEs
- 3D TLC supported
- Dual ARM Cortex R5 CPU + Andes N25 CoXProcessor™
- Phison 5<sup>th</sup> Gen LDPC + RAID ECC
- AES 256 / TCG Opal
- Form Factor: M.2 2280

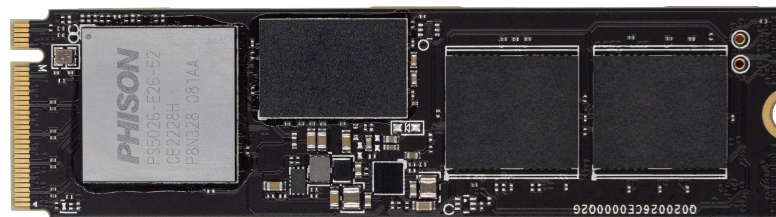

*\*Based on SSD module capability.*

### Sequential Performance\*

**Read:** 14,000 MB/s

**Write:** 12,000 MB/s

### Random Performance\*

**Read:** 1,500K IOPS

**Write:** 1,600K IOPS

**PHISON**