


PS3107-S7 SATA Flash Module

(Reference Design)

Phison's PS3107 SATA Flash Module delivers all the advantages of flash disk technology with the Serial ATA I/II interface and can be mounted directly to the host. PS3107 SATA Flash Module is a small form factor with the advantages of high density, fast read/write performance and low power consumption. Moreover, the small size of the PS3107 SATA Flash Module makes it an ideal SSD solution for space-restricted devices and an alternative to the 2.5-inch SSDs.

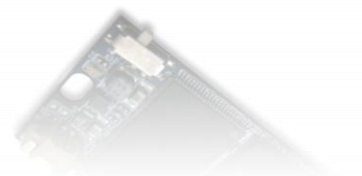

Product Specification

Capacity	4GB ~ 64GB
SATA Interface	SATA Revision 2.6 SATA 1.5Gbps and 3Gbps interface
Flash Interface	Flash Type: SLC, MLC 1pcs to 2pcs of TSOP flash 1pcs of BGA flash
Performance*	Read: up to 135 MB/s Write: up to 50 MB/s
Power Consumption*	Active mode: < 990 mW Idle mode: < 100 mW
MTBF	More than 1,000,000 hours
Advanced Flash Management	Static and Dynamic Wear Leveling, Bad Block Management, TRIM, SMART, Over-Provision, Firmware Update
Operating Voltage	5V
Operating Temperature	0°C ~ 70°C
Storage Temperature	-40°C ~ 85°C

* Performance and Power Consumption may differ according to flash type, flash configuration, SDR configuration, and platform.